
Poolside Bar Table

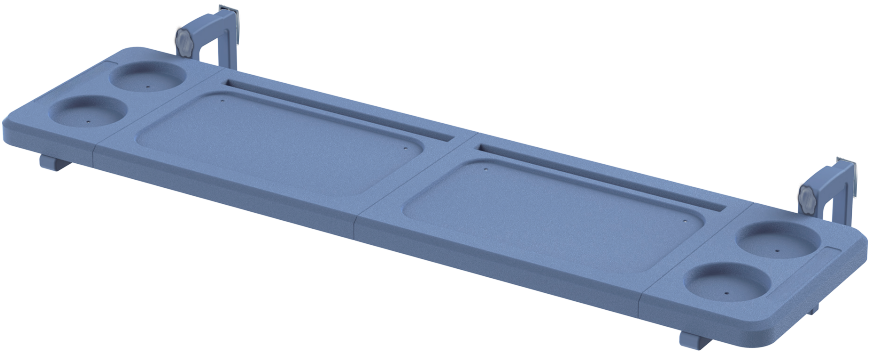





User Manual

WARRANTY & CUSTOMER SERVICE

We offer a 100% satisfaction guarantee and 12 months warranty! We offer a free replacement or refund guarantee for any quality issues.

24 Hours Customer Support: Leteuke Customer Service Team
E-mail: support@Leteuke.com

Accessories


 Foldable Table Panel x1	 Side Cup Holder Panel x2	 Support Bracket x2	 L-shaped Adjustable Support Bracket x2
 Long Screw x2	 Medium Screw x4	 Short Screw x4	 Table Leg Locking Knob x2
 Anti-slip Footpad x2	 Plastic Hook x4	 Adjustable Slider x4	 Load-bearing Slider x2	 User Manual x1

Installation Steps

Step 1

Unfold the foldable table panel. Move the load-bearing slider to the middle to evenly distribute the tabletop's force and enhance overall load capacity.


Tips: The raised screw secures the slider in place.

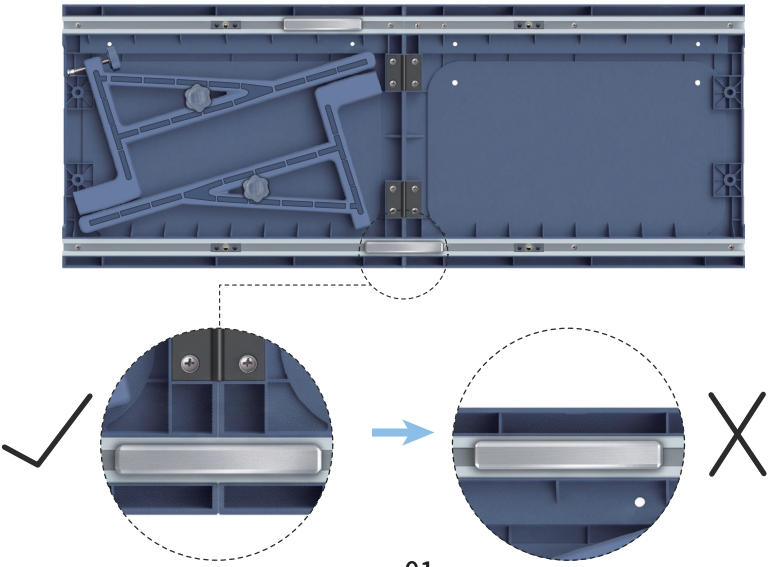

Installation Steps


Step 2

Loosen and remove 2 middle screws, take out the support brackets.

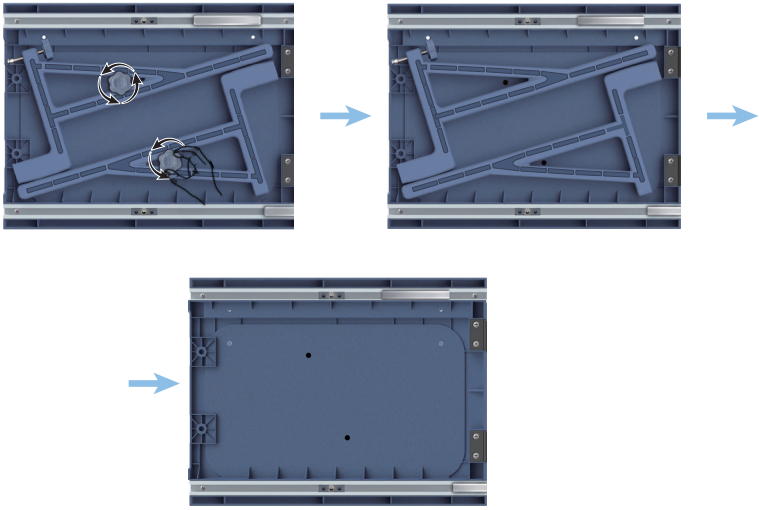

Step 3


Align L-shaped adjustable support bracket with support bracket, and adjust to the desired length by long screw. Max adjustable length: 5.7 inches.

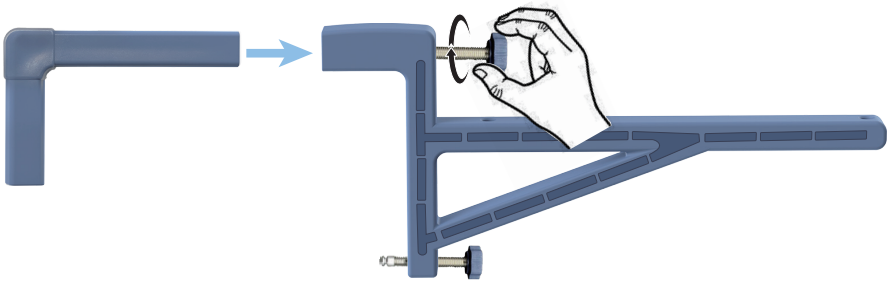

Installation Steps

Step 6

Remove the 4 adjustable sliders from foldable table panel, then use medium screws to connect the adjustable sliders through the holes in the support brackets (Do not tighten the screws).

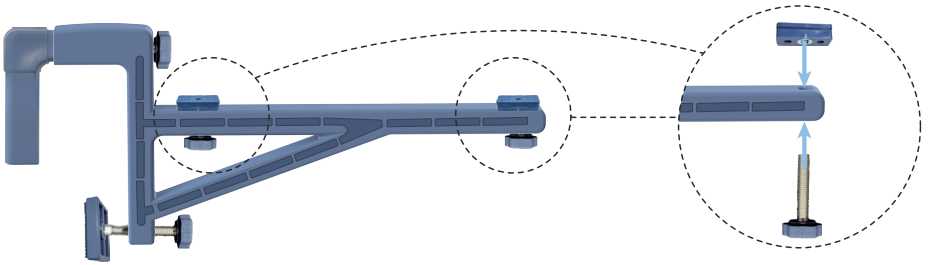

Step 7


Align assembled support brackets with foldable table panel's slide rails by adjustable sliders, then adjust to the desired installation size.



Installation Steps


Step 8

Press anti-slip footpads firmly into the table leg locking knobs.

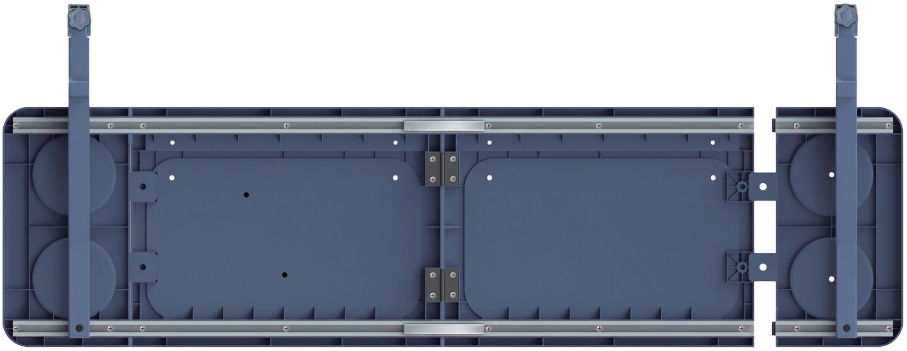

Step 9

After full installation, use the long screws to set the device to the required pool size, and it is ready for use.

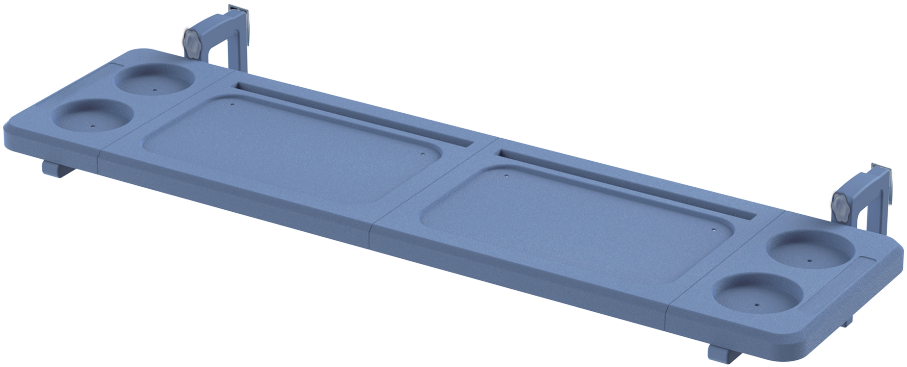

Warning

Combined weight capacity: 110LBS.
Children must be under adult supervision at all times when near the table.
Do not expose to extreme weather conditions (high winds, heavy rain, heavy snow).
Follow assembly instructions strictly. Improper assembly may cause injury.
Clean only with mild soapy water. Avoid abrasive cleaners that may damage the surface.
Recommended for indoor storage during winter to extend product lifespan.

Clean & Maintenance

1. Daily Basic Maintenance

After use, dry the tabletop with a clean cloth to prevent water stains and mold growth.
Regularly check if the legs and connectors are loose; tighten screws promptly if found.
Do not place sharp, heavy or high-temperature items on the tabletop to avoid scratching or damaging the PP surface.

2. Cleaning Specifications

Clean only with mild soapy water + warm water, using a soft sponge or microfiber cloth for gentle wiping.
Do not use abrasive cleaners, steel wool, bleach or strong chemical solvents (e.g., acetone, alcohol) to avoid corroding or whitening the PP surface.
For salt spray environments (coastal areas): Rinse the table with fresh water weekly to remove salt residue and prevent material aging.

3. Storage Requirements

For long-term storage, keep in a cool, dark and well-ventilated place away from direct sunlight and damp corners.
Do not leave the table outdoors in extreme weather (heavy rain, strong wind, snow, heatwaves); move it indoors whenever possible.
Do not stack heavy objects on the table during storage to prevent structural deformation.

4. Accessory Maintenance (Including screws/non-slip pads/connectors)

Stainless steel screws/accessories: Wipe with a dry cloth promptly after contact with water to prevent rust; apply a small amount of anti-rust oil for coastal use.

Special Notes

Slight fading or brittleness of the PP material due to long-term outdoor exposure is a normal physical change, and timely storage can delay aging.

Warm Tips

Upon first use, please refer to the user manual, or scan the QR code to watch the installation guide video for specific operations.


Thank you for choosing Leteuke!

If you have any problems, please contact us at support@Leteuke.com immediately.
Leteuke customer service team is committed to providing you with the fastest and most effective solutions.

Installation Steps

Step 4

Align L-shaped adjustable support bracket with support bracket, and adjust to the desired length by long screw. Min adjustable length: 2.4 inches.

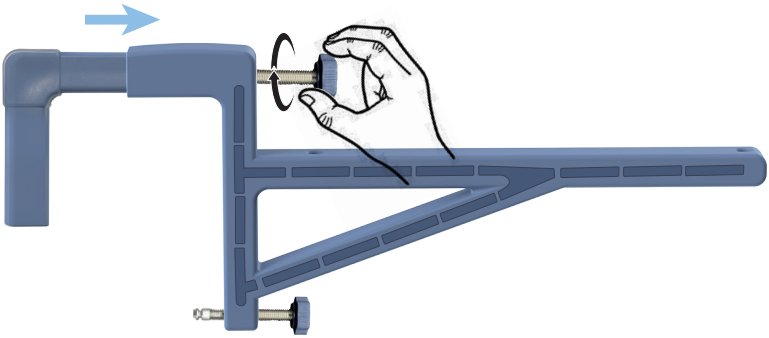

Step 5

Press anti-slip footpads firmly into the table leg locking knobs.

